



DELIVERING YOUR MESSAGE

## PBC6/T - PBC6T/EN

Open-back wallmount Loudspeakers

### MAIN PROPERTIES

Rated power, Watts: 6
Tappings 100 volt line, Watts: 6 / 3 / 1.5 / 0.75 / 0.25
Transformer Impedance, Ohms, 100V: 1.67k/3.33k/6.66k/13.3k/39.9k
Tappings 70.7 volt line, Watts: 3 / 1.5 / 0.75 / 0.25 / 0.125
Driver impedance, Ohms: 8
Effective frequency range, Hz (BSEN60268-5): 160 – 18,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz:96
S.P.L. @ Full power Octave Bandwidth, dB: 104
Acoustic Power (dB-PWL@1 watt) 1 k/2kHz, dB: 94/95
Dispersion at 1k/2k Hz, Degrees: 180/120
Directivity Axial Q factor, 1 k/2kHz: 3.6/5.8
Dimensions, front & depth, mm: 330 x 240 x 90
Net weight, Kgs: 1.15
Colour/Finish : White
Material ABS moulding with UV inhibitors
Steel mesh
Mounting Keyhole and/or screws

PBC6T/EN is BS5839 Part 8 voice alarm compliant



[www.ateis-europe.com](http://www.ateis-europe.com)

ATEIS Europe BV - Sydneystraat 42 - 3047BP ROTTERDAM - NETHERLANDS

Phone +31 (0)10 2088690 - Fax +31 (0)10 2088699



DELIVERING YOUR MESSAGE

## PBC6/T - PBC6T/EN

Open-back wallmount Loudspeakers




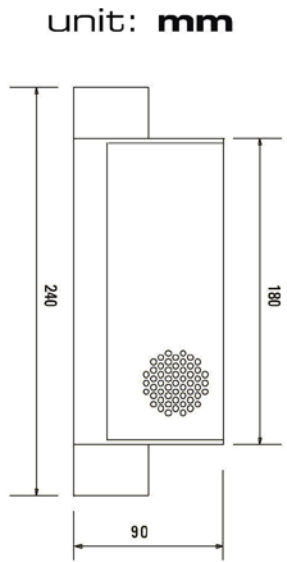


diagram  
PBC6T/EN

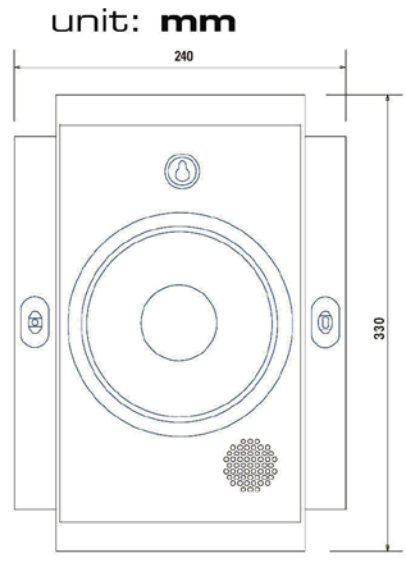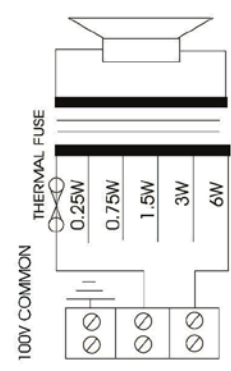

### speech octave band sensitivity

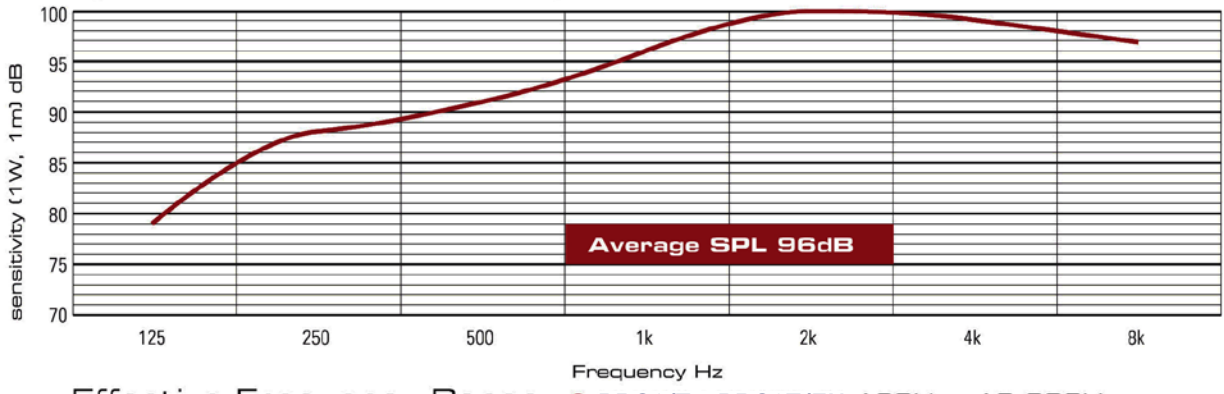

Effective Frequency Range ● PBC6/T - PBC6T/EN 160Hz - 18,000Hz