


SCP2xx



ADDITIONAL INFORMATION

This manual is put together with much care, and is as complete as could be on the publication date. However, updates on the specifications, functionality or software may have occurred since publication. To obtain the latest version of both manual and software, please visit the Audac website @ audac.eu.

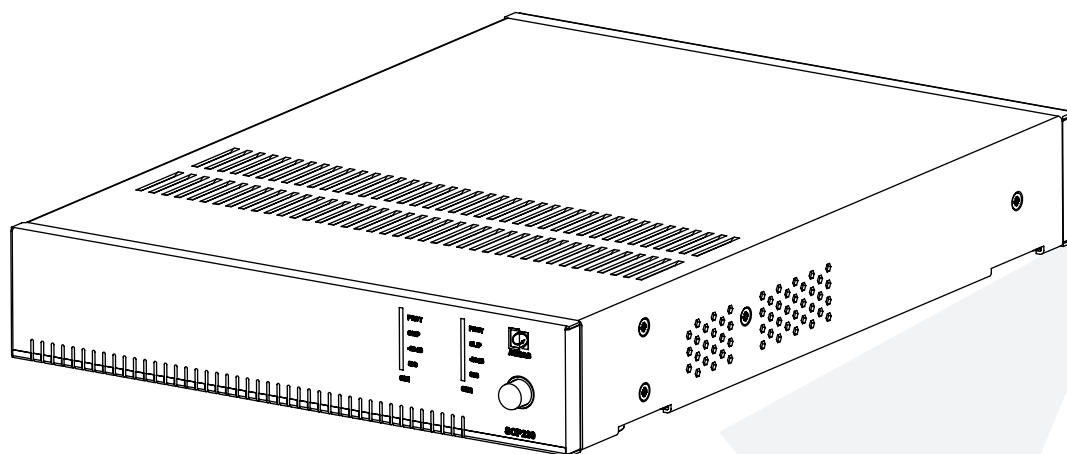

REV-3.8

Table of contents



| | |
|--|-----------|
| Introduction | 5 |
| Compact dual-channel power amplifier | 5 |
| Precautions | 6 |
| Chapter 1 | 8 |
| Connections and connectors | 8 |
| Chapter 2 | 9 |
| Front panel overview | 9 |
| Rear panel overview | 10 |
| Technical specifications | 13 |

Compact dual-channel power amplifier

The SCP series is a range of extremely powerful compact dual-channel power amplifiers for commercial use. These half 19" devices can be used in stereo low impedance or 70/100V bridge mode. There are several different models to serve a wide range of applications with power ratings that vary between 120W to 1000W in a half 19" rack space housing.

The compact and elegant design of the half 19" rack space enclosure allows for single installation in a 10.5" equipment rack, or side-by-side (two devices) in a 19" equipment rack.

A connection to the WP2xx series input wall panels or volume controllers can be made via the RJ45 connectors on the back of the SCP.

Equipped with a standby mode switch, the SCP series will enter an energy-saving standby mode after a period of inactivity. This feature together with the overall energy-efficient design makes the SCP meet the high standards of the Energy Star certification.

When you combine the SCP series with a suitable pre-amplifier or wall-mounted input panel you create a powerful and complete solutions for background music installations.

READ FOLLOWING INSTRUCTIONS FOR YOUR OWN SAFETY

ALWAYS KEEP THESE INSTRUCTIONS. NEVER THROW THEM AWAY

ALWAYS HANDLE THIS UNIT WITH CARE

HEED ALL WARNINGS

FOLLOW ALL INSTRUCTIONS

NEVER EXPOSE THIS EQUIPMENT TO RAIN, MOISTURE, ANY DRIPPING OR SPLASHING LIQUID. AND NEVER PLACE AN OBJECT FILLED WITH LIQUID ON TOP OF THIS DEVICE.

DO NOT PLACE THIS UNIT IN AN ENCLOSED ENVIRONMENT SUCH AS A BOOKSHELF OR CLOSET. ENSURE THERE IS ADEQUATE VENTILATION TO COOL THE UNIT. DO NOT BLOCK THE VENTILATION OPENINGS.

DO NOT STICK ANY OBJECTS THROUGH THE VENTILATION OPENINGS.

DO NOT INSTALL THIS UNIT NEAR ANY HEAT SOURCES SUCH AS RADIATORS OR OTHER APPARATUS THAT PRODUCE HEAT

DO NOT PLACE THIS UNIT IN ENVIRONMENTS WHICH CONTAIN HIGH LEVELS OF DUST, HEAT, MOISTURE OR VIBRATION

THIS UNIT IS DEVELOPED FOR INDOOR USE ONLY. DO NOT USE IT OUTDOORS

PLACE THE UNIT ON A STABLE BASE OR MOUNT IT IN A STABLE RACK

ONLY USE ATTACHMENTS & ACCESSORIES SPECIFIED BY THE MANUFACTURER

UNPLUG THIS APPARATUS DURING LIGHTNING STORMS OR WHEN UNUSED FOR LONG PERIODS OF TIME

ONLY CONNECT THIS UNIT TO A MAINS SOCKET OUTLET WITH PROTECTIVE EARTHING CONNECTION

THE MAINS PLUG OR APPLIANCE COUPLER IS USED AS THE DISCONNECT DEVICE, SO THE DISCONNECT DEVICE SHALL BE READILY OPERABLE

USE THE APPARATUS ONLY IN MODERATE CLIMATES

THIS DEVICE CAN BE SOLD IN ALL EU REGIONS

CAUTION

The symbols shown are internationally recognized symbols that warn about potential hazards of electrical products. The lightning flash with arrow point in an equilateral triangle means that the unit contains dangerous voltages. The exclamation point in an equilateral triangle indicates that it is necessary for the user to refer to the users manual.



These symbols warn that there are no user serviceable parts inside the unit. Do not open the unit. Do not attempt to service the unit yourself. Refer all servicing to qualified personnel. Opening the chassis for any reason will void the manufacturer's warranty. Do not get the unit wet. If liquid is spilled on the unit, shut it off immediately and take it to a dealer for service. Disconnect the unit during storms to prevent damage.



CAUTION - SERVICING

This product contains no user serviceable parts. Refer all servicing to qualified service personnel. Do not perform any servicing (unless you are qualified to)



EC DECLARATION OF CONFORMITY

This product conforms to all the essential requirements and further relevant specifications described in following directives: 2014/30/EU (EMC) and 2014/35/EU (LVD). All related standards are listed in a Declaration of Conformity (DoC), which can be found in the products download section on the web-page audac.eu, or through scanning the QR code on page 2 of this user manual.



WASTE ELECTRICAL AND ELECTRONIC EQUIPMENT (WEEE)

The WEEE marking indicates that this product should not be disposed with regular household waste at the end of its life cycle. This regulation is created to prevent any possible harm to the environment or human health.

This product is developed and manufactured with high quality materials and components which can be recycled and/or reused. Please dispose this product at your local collection point or recycling centre for electrical and electronic waste. This will make sure that it will be recycled in an environmentally friendly manner, and will help to protect the environment in which we all live.

POWER SUPPLY AND POWER CORD REQUIREMENTS

Power supply class I grounding requirements:

For protection from fault currents, the equipment shall be connected to a grounding terminal. Plug the system power cord into an AC outlet that provides a ground connection. Substitute cords may not provide adequate fault protection. Only use the power cord supplied with this product or an authorized/equivalent replacement

SAFETY NOTICES:

DENMARK: Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord.

FINLAND: Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan.

NORWAY: Apparatet må tilkoples jordet stikkontakt.

SWEDEN: Apparatens skall anslutas till jordat uttag.



ENERGY STAR CERTIFICATION

This product qualifies for ENERGY STAR in the "factory default" setting and this is the setting in which power savings will be achieved. Changing the factory default settings or enabling other features will increase power consumption that could exceed the limits necessary to qualify for ENERGY STAR rating. We want to help you save energy.


Connections and connectors

CONNECTION STANDARDS

The in- and output connections for AUDAC audio equipment are performed according to international wiring standards for professional audio equipment


3-Pin Terminal block:

For balanced line input connections




Left: Signal - (XLR Pin 3)
Center: Signal + (XLR Pin 2)
Right: Ground (XLR Pin 1)

For balanced signal input connections

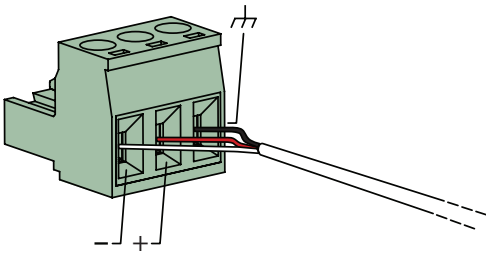


For unbalanced signal input connections

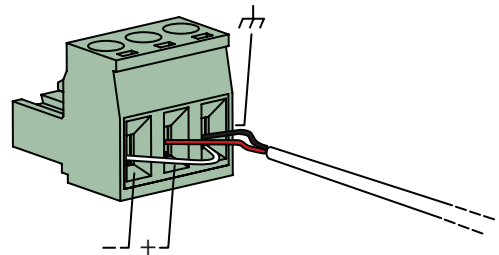

RJ45 (audio):


Remote input units



| | | |
|--------------|--------------|-----------------|
| Pin 1 | White-Orange | Left channel + |
| Pin 2 | Orange | Left channel - |
| Pin 3 | White-Green | +24V DC |
| Pin 4 | Blue | Not connected |
| Pin 5 | White-Blue | Not connected |
| Pin 6 | Green | GND |
| Pin 7 | White-Brown | Right channel + |
| Pin 8 | Brown | Right channel - |


RJ45 (control):

Remote volume controller



| | | |
|--------------|--------------|------------------------------------|
| Pin 1 | White-Orange | Not connected |
| Pin 2 | Orange | Not connected |
| Pin 3 | White-Green | GND |
| Pin 4 | Blue | Variable control voltage (0 ~ 10V) |
| Pin 5 | White-Blue | +10V |
| Pin 6 | Green | +10V |
| Pin 7 | White-Brown | Not connected |
| Pin 8 | Brown | Not connected |

Front panel overview

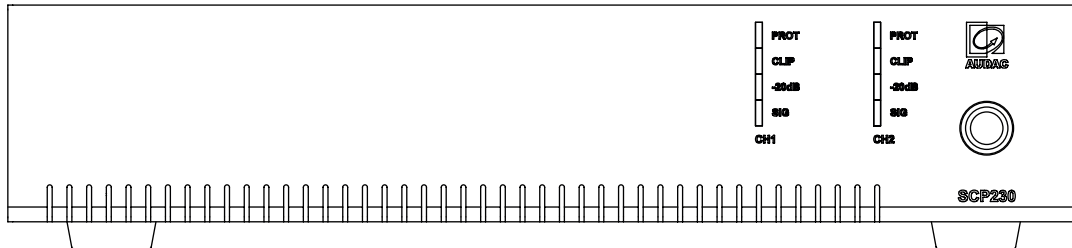

Indicator LEDs (VU):

Channel monitoring is made convenient by four indicator LEDs for each channel.


The LEDs give a continuous indication of the operation of the corresponding channel. The green signal LED illuminates whenever a signal is present, while the -20dB LED illuminates when the input signal exceeds the -20 dB level. The Clip LED illuminates when the corresponding channel is working at the maximum level. To ensure the best signal-to-noise ratio, the Clip LED should illuminate only (or maximum) at peak levels.

When the Clip LED illuminates, the output limiter of the amplifier will intervene avoiding a distorted “Clipping” sound on the output. The Protection LED will illuminate when overheating occurs, or any other fault is detected. When the protection LED is illuminated, no signal will be available on the outputs. The Protection LED will also illuminate when the external mute contacts are activated.

Power switch:

A power switch is used to switch the amplifier on and off. The LED ring around the switch illuminates in blue colour when the power is switched on or will illuminate in orange color when switched to standby mode.

Rear panel overview

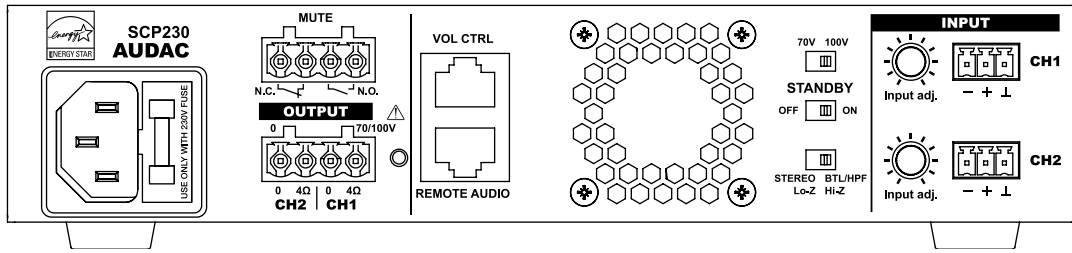

AC Power inlet with fuse:


The mains power supply (100-240V AC - 50/60 Hz) has to be applied to this AC power inlet.

Mute connection:


A priority mute contact connection is present which allows complete muting of background music in the presence of a contact closure between both 'MUTE' contacts.

This contact is convenient for situations where a separate emergency system is installed and complete background music muting is required. For example, on the occasion of a fire alarm. The emergency system output contacts can be linked to this contact input. When a N.C. contact trigger is being used, a contact bridge shall be used between both N.O. contact terminals.

Normal open mute contact diagram




Normal closed mute contact diagram




Audio output connection:

The speakers shall be connected to the terminal block output connector. Depending on the setup, two speakers can be connected in low impedance stereo setup, or one speaker line can be connected in a constant voltage 70/100V bridge configuration. Typical wiring applications are shown in the following diagrams.

SCP2xx connected in stereo mode

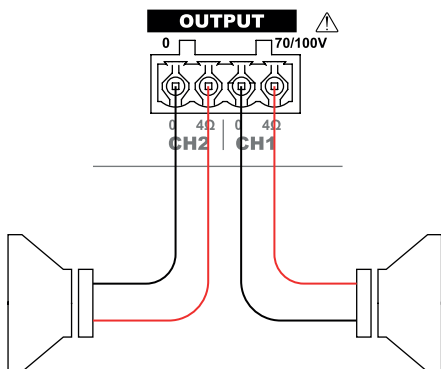

SCP2xx connected in bridge mode

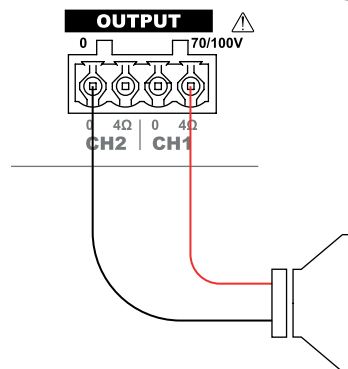

SCP series minimum load impedance in 4 Ohm stereo output mode

| | Output voltage | Impedance | Power |
|--------|----------------|-----------|--------------|
| SCP206 | 15.5 Volt | 4 Ohm | 2 x 60 Watt |
| SCP212 | 22 Volt | 4 Ohm | 2 x 120 Watt |
| SCP224 | 31 Volt | 4 Ohm | 2 x 240 Watt |
| SCP230 | 35 Volt | 4 Ohm | 2 x 300 Watt |
| SCP250 | 45 Volt | 4 Ohm | 2 x 500 Watt |

SCP series minimum load impedance in 70 Volt bridge mode

| | Output voltage | Impedance | Power |
|---------------|----------------|-----------|-----------|
| SCP206 | 70 Volt | 41.67 Ohm | 120 Watt |
| SCP212 | 70 Volt | 20.83 Ohm | 240 Watt |
| SCP224 | 70 Volt | 10.41 Ohm | 480 Watt |
| SCP230 | 70 Volt | 8.33 Ohm | 600 Watt |
| SCP250 | 70 Volt | 5 Ohm | 1000 Watt |

SCP series minimum load impedance in 100 Volt bridge mode

| | Output voltage | Impedance | Power |
|---------------|----------------|-----------|-----------|
| SCP206 | 100 Volt | 83.33 Ohm | 120 Watt |
| SCP212 | 100 Volt | 41.67 Ohm | 240 Watt |
| SCP224 | 100 Volt | 20.83 Ohm | 480 Watt |
| SCP230 | 100 Volt | 16.67 Ohm | 600 Watt |
| SCP250 | 100 Volt | 10 Ohm | 1000 Watt |

Remote audio input:

A remote audio wall panel (e.g. WP2xx) can be connected to the bottom 'Remote audio' RJ45 connector for providing a remote audio input. The connection of this extension port can be made by using CAT5e (or better) twisted pair cable in a straight pinout configuration.

Pinout and colour coding are described in Chapter 1 of this instruction manual. The remote audio input provides stereo balanced line input with an input sensitivity of +12dBV and a +24V output for powering external audio panels. The audio signal from the remote audio input is mixed with the amplifier's line inputs.

Remote volume control:

The top 'Vol Ctrl' RJ45 connector allows for an external control of the main volume of the SCP amplifier. The connection of this extension port can be made by using CAT5e (or better) twisted pair cable in a straight pinout configuration. Pinout and colour coding are described in Chapter 1 of this instruction manual.

The remote volume controller connection is designed for use with a suitable volume controller (e.g. Audac WP200, VC3208). It is a VCA input, working between 0-10V (linear envelope), and can be used with an external 0-10V control system. The amplifiers overall volume is controlled dependent on the applied control voltage. A control voltage of 10V means no attenuation, while 0V mutes the amplifier. When no external controller is connected, the volume is at maximum.

Standby switch:

The Standby mode of the SCP can be turned on or off. When enabled, the SCP will automatically go into standby mode after 30 minutes of inactivity (no signal detection).

Stereo- (Lo-Z) / bridge- (Hi-Z) mode switch:

Provides the possibility to switch the amplifier between Lo-Z and Hi-Z modes. If this switch is set to Lo-Z stereo, the output will be stereo and capable of driving low impedance speakers. If it is set to Hi-Z BTL/HPF, both output channels are bridged and capable of driving high impedance / constant voltage speaker systems. The output voltage can be switched between 70/100V through using a corresponding switch, depending on the requirements of the installation. An HPF (70 Hz) will be enabled when switched to Hi-Z.

70V / 100V switch:

When switched in Hi-Z mode (STEREO - BTL-HPF) the output voltage can be switched between 70/100V using this switch. In Hi-Z mode, the amplifier channel CH1 input is used and the input source should be a mono-summed signal which is configured on the source side. When using a WP2XX as the source, the wallpanel needs to be set to Mono mode using the DIP switch on the back.

Balanced stereo line input:

The balanced stereo line inputs use 3-pins terminal block connectors. All different kinds of balanced and unbalanced line level audio sources can be connected to the line inputs. Some examples are pre-amplifiers, mixers and spoken messages through an audio source. It is fitted with a gain control potentiometer by which the input sensitivity can be controlled within a range of -3 dBV ~ +7 dBV.

Technical specifications



| | | SCP206 | SCP212 | SCP224 |
|--|--------------------------|--|-------------------------|--------------|
| RMS/AES power handling | @ 4 Ohm stereo | 2 x 60 Watt | 2 x 120 Watt | 2 x 240 Watt |
| | @ 8 Ohm stereo | 2 x 30 Watt | 2 x 60 Watt | 2 x 120 Watt |
| | @ 70/100V bridge | 120 Watt | 240 Watt | 480 Watt |
| Frequency response | | 20 Hz - 20 kHz | | |
| Signal / Noise | | > 95 dB | | |
| THD+N | | < 0.05% | | |
| Amplifier technology | | Class D | | |
| Cooling | | Convection cooled | Fan cooled (controlled) | |
| Inputs | Balanced line | 2 x Balanced line input 3-pin terminal block ~ 3.81mm | | |
| | Remote audio input | RJ45 | | |
| | Remote volume controller | RJ45 | | |
| | Priority mute contact | NO or NC | | |
| Outputs | | Low Z & 70/100V speaker output 4-pin terminal block ~ 5.08 mm | | |
| Controls | | Gain control (potentiometer) | | |
| | | Stereo low Z & mono high switch | | |
| | | 70/100V switch | | |
| | | Standby ON/OFF | | |
| Power supply | | 100 ~ 240 V AC / 50 ~ 60 Hz | | |
| Power consumption | Standby | 0.5 W | 0.5W | 0.5W |
| | Idle | 19W | 19W | 19W |
| | 1/8 rated power | 42W | 60W | 100W |
| | 1/3 rated power | 75W | 123W | 220W |
| Ambient temperature range (in operation) | | 0°C ~ +40°C | | |
| Relative humidity range | | < 80 %, not condensing | | |
| Dimensions (W x H xD) | | 217.5 x 43.7 x 300 mm | | |
| Weight | | 2.70 Kg | | |
| Mounting | | 1/2 19" / 1 HE or tabletop | | |
| Construction | | Steel | | |
| Color | | Black | | |
| Optional accessories | | WP2xx remote wall panel inputs | | |
| | | WP200 Remote volume controller | | |
| | | MBS310 rackmount adapter | | |

Technical specifications



| | | SCP230 | SCP250 |
|--|--------------------------|--|----------------------------|
| RMS/AES power handling | @ 4 Ohm stereo | 2 x 300 Watt | 2 x 500 Watt |
| | @ 8 Ohm stereo | 2 x 150 Watt | 2 x 250 Watt |
| | @ 70/100V bridge | 600 Watt | 1000 Watt (800 Watt @ 70V) |
| Frequency response | | 20 Hz - 20 kHz | |
| Signal / Noise | | > 95 dB | |
| THD+N | | < 0.05% | |
| Amplifier technology | | Class D | |
| Cooling | | Fan cooled (controlled) | |
| Inputs | Balanced line | 2 x Balanced line input 3-pin terminal block ~ 3.81mm | |
| | Remote audio input | RJ45 | |
| | Remote volume controller | RJ45 | |
| | Priority mute contact | NO or NC | |
| Outputs | | Low Z & 70/100V speaker output 4-pin terminal block ~ 5.08 mm | |
| Controls | | Gain control (potentiometer) | |
| | | Stereo low Z & mono high switch | |
| | | 70/100V switch | |
| | | Standby ON/OFF | |
| Power supply | | 100 ~ 240 V AC / 50 ~ 60 Hz | |
| Power consumption | Standby | 0.5 W | 0.5W |
| | Idle | 19W | 19W |
| | 1/8 rated power | 115W | 200W |
| | 1/3 rated power | 262W | 400W |
| Ambient temperature range (in operation) | | 0°C ~ +40°C | |
| Relative humidity range | | < 80 %, not condensing | |
| Dimensions (W x H xD) | | 217.5 x 43.7 x 300 mm | |
| Weight | | 2.70 Kg | |
| Mounting | | 1/2 19" / 1 HE or tabletop | |
| Construction | | Steel | |
| Color | | Black | |
| Optional accessories | | WP2xx remote wall panel inputs | |
| | | WP200 Remote volume controller | |
| | | MBS310 rackmount adapter | |



Discover more on audac.eu