



PBC SERIES

Open-back wallmount Loudspeakers

The PBC range of cabinet loudspeakers is a real innovation in design and performance. These exceptional loudspeakers are both stylish and elegant and offer a cost effective alternative to the conventional wooden cabinet loudspeaker.

The PBC 6/T is a 6 watt dual coned loudspeaker complete with line transformer, ideally suited for high quality speech and background music. The PBC 10/TCOAX is a 10 watt high performance loudspeaker that incorporates a two way coaxial drive unit and line transformer. The bass response has been extended to give depth and warmth to both music and speech whilst the drive unit has been carefully tailored to give an exceptionally smooth performance but still maintaining a high sensitivity.

Installation is quick and easy using concealed fixings, making these cabinets ideally suited for applications that require style as well as high performance such as shops, restaurants, hotels, public houses, offices etc.

This white moulded cabinet loudspeaker with an epoxy coated steel grille offers an alternative to the conventional wooden types available. The ABS plastic has added polymer to avoid discoloration in bright sun light (UV proofed).

In compliance with BS5839 part 8, the "C" versions incorporate a ceramic terminal and thermal fuse and are, therefore, suitable for use in voice alarm applications.



MODEL	Cone size	Frequency response	SPL dB @1w/1m	SPL dB@full power	Dispersion 1k/2kHz, degrees	Color	Power rating
PBC6T/EN	4"	160-18 kHz	96	104	180/120°	RAL 9016	6/3/1,5/0,75/0,25
PBC6T	4"	160-18 kHz	96	104	180/120°	RAL 9016	6/3/1,5/0,75/0,25
PBC10TCX/EN	4"+ tweeter	80-20 kHz	89	99	180/120°	RAL 9016	10/5/2,5/1,25
PBC10/COAX	4"+ tweeter	80-20 kHz	89	99	180/120°	RAL 9016	10/5/2,5/1,25

PWC SERIES


Open-back wallmount Loudspeakers

The PWC/6T is a 6 watt dual coned loudspeaker complete with 100 volt line transformer, ideally suited for high quality speech and background music. The bass response has been extended to give warmth and depth to both music and speech whilst still maintaining a high sensitivity.

Designed to make installation quick and easy using concealed fixings, this cabinet is ideally suited for

applications that require a straight forward, quick to install system such as schools, shops, restaurants, hotels, offices and public houses.

In compliance with BS5839 part 8, the "C" version (PWC/6TC) incorporates a ceramic terminal and thermal fuse and is, therefore, suitable for use in voice alarm applications.

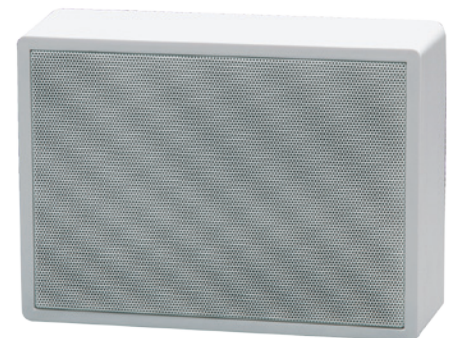

MODEL	Cone size	Frequency response	SPL dB @1w/1m	SPL dB@full power	Dispersion 1k/2kHz, degrees	Color	Power rating
PWC6T/EN	4"	220 -18 kHz	93	100	180/110°	RAL 9016	6/3/1,5/0,75,0,25
PWC6T	4"	220 -18 kHz	93	100	180/110°	RAL 9016	6/3/1,5/0,75,0,25