

Inspired by sound

Loudspeaker guide





CENA306(I)

Woofers/Tweeters
2,5" (Fullrange)

Impedance
8 Ohm / 100V / 70V

100V tapings
3W / 6W

70V tapings
1.5W / 3W

Program power handling
20 W

Frequency range
120 Hz - 20 KHz

Dispersion
160°

Cutout hole size
80 mm (Ø)

Built-in depth
69 mm

Mounting
SpringFit™

Connector
SnapConnect™

Dimensions (Ø x H)
95 x 72 mm

Weight
0.36 Kg

Innovations
SpringFit™, SnapConnect™

Grill colour
I/W - White (RAL9016)
& /B - Black (RAL9005)



CENA506(I)

Woofer/Tweeter

5" (Fullrange)

Impedance

8 Ohm / 100V / 70V

100V tapplings

3W / 6W

70V tapplings

1.5W / 3W

Program power handling

20 W

Frequency range

80 Hz - 18 KHz

Dispersion

155°

Cutout hole size

150 mm (Ø)

Built-in depth

57 mm

Mounting

SpringFit™

Connector

SnapConnect™

Dimensions (Ø x H)

180 x 60 mm

Weight

0.66 Kg

Innovations

SpringFit™, SnapConnect™

Grill colour

I/W - White (RAL9016)

&/B - Black (RAL9005)



CENA510DI

Woofer/Tweeter

5" (Fullrange)

Impedance

16 Ohm

100V tapplings

-

70V tapplings

-

Program power handling

20W

Frequency range

80 Hz - 18 kHz

Dispersion

155°

Cutout hole size

150 mm (Ø)

Built-in depth

57 mm

Mounting

SpringFit™

Connector

SnapConnect™

Dimensions (Ø x H)

180 x 60 mm

Weight

0.66 Kg

Innovations

SpringFit™, SnapConnect™

Grill colour

/W - White (RAL9016)



CENA706(I)

Woofers/Tweeters

6,5" (Fullrange)

Impedance

8 Ohm / 100V / 70V

100V tapings

3W / 6W

70V tapings

1.5W / 3W

Program power handling

20 W

Frequency range

70 Hz - 18 KHz

Dispersion

140°

Cutout hole size

167 mm (Ø)

Built-in depth

67 mm

Mounting

SpringFit™

Connector

SnapConnect™

Dimensions (Ø x H)

193 x 70 mm

Weight

0.71 Kg

Innovations

SpringFit™, SnapConnect™

Grill colour

I/W - White (RAL9016)

& /B - Black (RAL9005)



CENA710DI

Woofer/Tweeter

6,5" (Fullrange)

Impedance

16 Ohm

100V tapplings

-

70V tapplings

-

Program power handling

20W

Frequency range

70 Hz - 18 kHz

Dispersion

140°

Cutout hole size

167 mm (Ø)

Built-in depth

67 mm

Mounting

SpringFit™

Connector

SnapConnect™

Dimensions (Ø x H)

193 x 70 mm

Weight

0.71 Kg

Innovations

SpringFit™, SnapConnect™

Grill colour

/W - White (RAL9016)



CENA812(I)

Woofers/Tweeters
8" (Fullrange)

Impedance
8 Ohm / 100V / 70V

100V tapings
6W / 12W

70V tapings
3W / 6W

Program power handling
40 W

Frequency range
60 Hz - 18 KHz

Dispersion
130°

Cutout hole size
207 mm (Ø)

Built-in depth
78 mm

Mounting
SpringFit™

Connector
SnapConnect™

Dimensions (Ø x H)
232 x 81 mm

Weight
1.06 Kg

Innovations
SpringFit™, SnapConnect™

Grill colour
I/W - White (RAL9016)
& /B - Black (RAL9005)



CENA820DI

Woofer/Tweeter

8" (Fullrange)

Impedance

16 Ohm

100V tapplings

-

70V tapplings

-

Program power handling

40W

Frequency range

60 Hz - 18 kHz

Dispersion

130°

Cutout hole size

207 mm (Ø)

Built-in depth

77 mm

Mounting

SpringFit™

Connector

SnapConnect™

Dimensions (Ø x H)

232 x 81 mm

Weight

1,06 Kg

Innovations

SpringFit™, SnapConnect™

Grill colour

/W - White (RAL9016)



Weatherproof w/
optional GLI grill

CIRA506I

Woofers/Tweeters
5 1/4" / 1"

Impedance
8 Ohm / 100V / 70V

100V tapings
1.5W / 3W / 6W

70V tapings
0.75W / 1.5W / 3W

Program power handling
60 W

Frequency range
45 Hz - 20 KHz

Dispersion
145°

Cutout hole size
170 mm (Ø)

Built-in depth
75 mm

Mounting
QuickFit™

Connector
Multi-tap FastCon™

Dimensions (Ø x H)
193 x 79 mm

Weight
1.10 Kg

Innovations

TwistFix™, QuickFit™ & FastCon™

Grill colour
/W - White (RAL9016)
Optional: /OB - Black (RAL9005)
/OP - Paintable



Weatherproof w/
optional GLI grill

CIRA524I

Woofer/Tweeter
5 1/4" / 1"

Impedance
8 Ohm / 100V / 70V

100V tapplings
6W / 12W / 24W

70V tapplings
3W / 6W / 12W

Program power handling
60 W

Frequency range
45 Hz - 20 KHz

Dispersion
145°

Cutout hole size
170 mm (Ø)

Built-in depth
83mm

Mounting
QuickFit™

Connector
Multi-tap FastCon™

Dimensions (Ø x H)
193 x 87 mm

Weight
1.15 Kg

Innovations

TwistFix™, QuickFit™ & FastCon™

Grill colour
/W - White (RAL9016)
Optional: /OB - Black (RAL9005)
/OP - Paintable



Weatherproof w/
optional GLI grill

CIRA530DI

Woofers/Tweeters

5 1/4" / 1"

Impedance

16 Ohm

100V tapings

-

70V tapings

-

Program power handling

60 W

Frequency range

45 Hz - 20 KHz

Dispersion

145°

Cutout hole size

170 mm (Ø)

Built-in depth

75 mm

Mounting

QuickFit™

Connector

Multi-tap FastCon™

Dimensions (Ø x H)

193 x 79 mm

Weight

1.05 Kg

Innovations

TwistFix™, QuickFit™ & FastCon™

Grill colour

/W - White (RAL9016)

Optional: /OB - Black (RAL9005)

/OP - Paintable



Weatherproof w/
optional GLI grill

CIRA724I

Woofers/Tweeters
6,5" / 1"

Impedance
8 Ohm / 100V / 70V

100V tapplings
6W / 12W / 24W

70V tapplings
3W / 6W / 12W

Program power handling
60 W

Frequency range
45 Hz - 20 KHz

Dispersion
150°

Cutout hole size
200 mm (Ø)

Built-in depth
78mm

Mounting
QuickFit™

Connector
Multi-tap FastCon™

Dimensions (Ø x H)
224 x 82 mm

Weight
1.45 Kg

Innovations

TwistFix™, QuickFit™ & FastCon™

Grill colour

/W - White (RAL9016)

Optional: /OB - Black (RAL9005)

/OP - Paintable



Weatherproof w/
optional GLI grill

CIRA730DI

Woofers/Tweeters
6,5" / 1"

Impedance
16 Ohm

100V tapings
-

70V tapings
-

Program power handling
60 W

Frequency range
45 Hz - 20 KHz

Dispersion
150°

Cutout hole size
200 mm (Ø)

Built-in depth
75mm

Mounting
QuickFit™

Connector
Multi-tap FastCon™

Dimensions (Ø x H)
224 x 79 mm

Weight
1.45 Kg

Innovations

TwistFix™, QuickFit™ & FastCon™

Grill colour

/W - White (RAL9016)

Optional: /OB - Black (RAL9005)

/OP - Paintable



Weatherproof w/
optional GLI grill

CIRA824I

Woofers/Tweeters
8" / 1"

Impedance
8 Ohm / 100V / 70V

100V tapings
6W / 12W / 24W

70V tapings
3W / 6W / 12W

Program power handling
80 W

Frequency range
33 Hz - 20 KHz

Dispersion
140°

Cutout hole size
243 mm (Ø)

Built-in depth
82mm

Mounting
QuickFit™

Connector
Multi-tap FastCon™

Dimensions (Ø x H)
270 x 86 mm

Weight
1.75 Kg

Innovations

TwistFix™, QuickFit™ & FastCon™

Grill colour

/W - White (RAL9016)

Optional: /OB - Black (RAL9005)

/OP - Paintable



Weatherproof w/
optional GLI grill

CIRA840DI

Woofers/Tweeters
8" / 1"

Impedance
16 Ohm

100V tapings
-

70V tapings
-

Program power handling
80 W

Frequency range
33 Hz - 20 KHz

Dispersion
140°

Cutout hole size
243 mm (Ø)

Built-in depth
82mm

Mounting
QuickFit™

Connector
Multi-tap FastCon™

Dimensions (Ø x H)
270 x 86 mm

Weight
1.65 Kg

Innovations


TwistFix™, QuickFit™ & FastCon™

Grill colour

/W - White (RAL9016)

Optional: /OB - Black (RAL9005)

/OP - Paintable

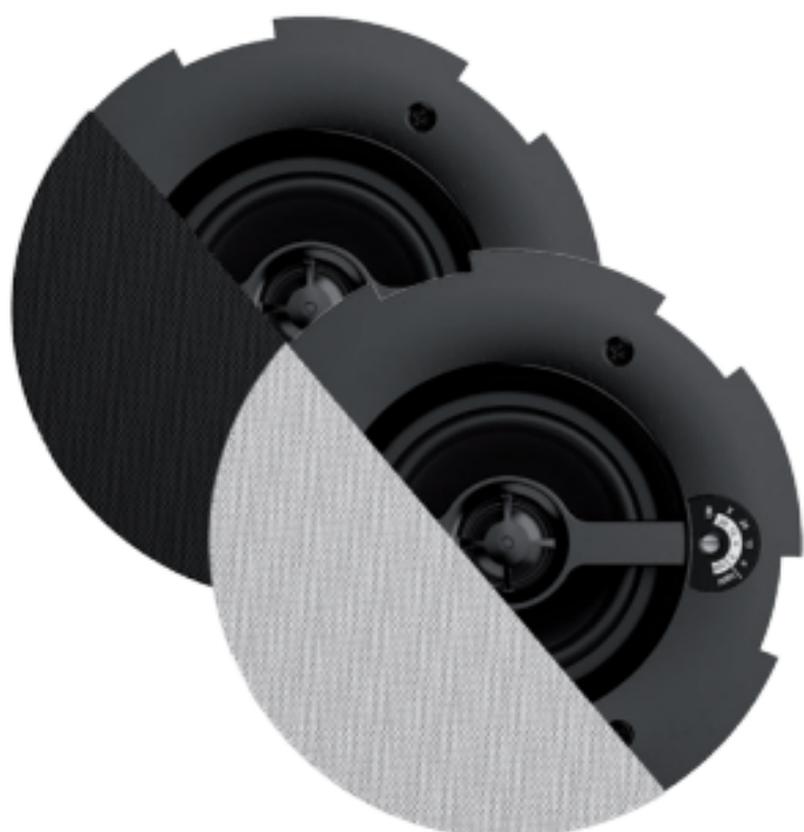

WeatherTreated w/
optional GLI grill

CAL424II

Woofers/Tweeters
4" / 1"

Impedance
8 Ω / 100V / 70V

100V tapings
6W / 12W / 24W

70V tapings
3W / 6W / 12W / 24W

Program power handling
60 W

Frequency range (-10 dB)
70 Hz - 20 KHz

Dispersion (Conical)
155° (1 - 4 KHz - Avg 1/3 oct)

Cutout hole size
170 mm (\varnothing)

Built-in depth
122 mm (w/ rear dome)

Mounting & connector
SafeLatch™ & Pluggable terminal

IP-rating
IP56 (With optional GLI grill)

Dimensions (\varnothing x H)
192 x 138 mm

Weight
2.26 Kg

Innovations
TwistFix™, SafeLatch™

Grill colour
/W - White (RAL9016)
Optional: /OB - Black (RAL9005)
/OP - Paintable



WeatherTreated w/
optional GLI grill

CAL660II

Woofers/Tweeters
6,5" / 1"

Impedance
8 Ω / 100V / 70V

100V tapings
15W / 30W / 60W

70V tapings
7.5W / 15W / 30W / 60W

Program power handling
120 W

Frequency range (-10 dB)
70 Hz - 20 KHz

Dispersion (Conical)
120° (1 - 4 KHz - Avg 1/3 oct)

Cutout hole size
220 mm (\varnothing)

Built-in depth
132 mm (w/ rear dome)

Mounting & connector
SafeLatch™ & Pluggable terminal

IP-rating
IP56 (With optional GLI grill)

Dimensions (\varnothing x H)
242 x 138 mm

Weight
3.42 Kg

Innovations
TwistFix™, SafeLatch™

Grill colour
/W - White (RAL9016)
Optional: /OB - Black (RAL9005)
/OP - Paintable



CELO2I

Woofer/Tweeter

2" (Fullrange)

Impedance

8 / 16 Ohm (D)

100V tapplings

-

70V tapplings

-

Program power handling

20 W

Frequency range

100 Hz - 20 KHz

Dispersion

165°

Cutout hole size

100 mm (Ø)

Built-in depth

95 mm

Mounting

QuickFix™ screws

Connector

Springclamps

Dimensions (Ø x H)

118 x 98 mm

Weight

0.35 Kg

Innovations

SlimLine™ grill, GoldCon™ & QuickFix™

Grill colour

/W - White (RAL9016)

Optional: /B - Black (RAL9005)



CELO51

Woofer/Tweeter
5" / 1"

Impedance
8 Ohm

100V tapplings
-

70V tapplings
-

Program power handling
100 W

Frequency range
55 Hz - 20 KHz

Dispersion
155°

Cutout hole size
155 mm (Ø)

Built-in depth
83 mm

Mounting
QuickFix™ screws

Connector
Springclamps

Dimensions (Ø x H)
180 x 86 mm

Weight
1.00 Kg

Innovations

SlimLine™ grill, GoldCon™ & QuickFix™

Grill colour

/W - White (RAL9016)

Optional: /B - Black (RAL9005)





CELO6I

Woofer/Tweeter
6" / 1"

Impedance
8 Ohm

100V tapplings

-

70V tapplings

-

Program power handling
120 W

Frequency range
44 Hz - 20 KHz

Dispersion
140°

Cutout hole size
205 mm (Ø)

Built-in depth
100 mm

Mounting
QuickFix™ screws

Connector
Springclamps

Dimensions (Ø x H)
230 x 103 mm

Weight
1.65 Kg

Innovations

SlimLine™ grill, GoldCon™ & QuickFix™

Grill colour

/W - White (RAL9016)

Optional: /B - Black (RAL9005)





CELO81

Woofer/Tweeter
8" / 1"

Impedance
8 Ohm

100V tapplings
-

70V tapplings
-

Program power handling
160 W

Frequency range
32 Hz - 20 KHz

Dispersion
135°

Cutout hole size
245 mm (Ø)

Built-in depth
115 mm

Mounting
QuickFix™ screws

Connector
Springclamps

Dimensions (Ø x H)
270 x 118 mm

Weight
2.25 Kg

Innovations

SlimLine™ grill, GoldCon™ & QuickFix™

Grill colour

/W - White (RAL9016)

Optional: /B - Black (RAL9005)





CELO8SI

Woofers/Tweeters
8"

Impedance
8 Ohm

100V tapings
-

70V tapings
-

Program power handling
2 x 100 W

Frequency range
32 Hz - 200 Hz

Dispersion
-

Cutout hole size
250 mm (Ø)

Built-in depth
117 mm

Mounting
QuickFix™ screws

Connector
Terminal block

Dimensions (Ø x H)
275 x 120 mm

Weight
2.75 Kg

Innovations
SlimLine™ grill, QuickFix™

Grill colour
/W - White (RAL9016)
Optional: /B - Black (RAL9005)



MERO2

Woofers/Tweeters
2" (Fullrange)

Impedance
8 / 16 Ohm (D)

100V tapings
-

70V tapings
-

Program power handling
20 W

Frequency range
100 Hz - 20 KHz

Dispersion
160° (H/V)

Cutout hole size
128 x 80 mm

Built-in depth
70 mm

Mounting
QuickFix™ screws

Connector
Springclamps

Dimensions (W x H x D)
146 x 98 x 70 mm

Weight
0.36 Kg

Innovations
SlimLine™ grill, GoldCon™ &
QuickFix™



MERO5

Woofer/Tweeter
5" / 1"

Impedance
8 Ohm

100V tapplings

-

70V tapplings

-

Program power handling
100 W

Frequency range
55 Hz - 20 KHz

Dispersion
160° x 140° (H/V)

Cutout hole size
214 x 139 mm

Built-in depth
71 mm

Mounting
QuickFix™ screws

Connector
Springclamps

Dimensions (W x H x D)
161.5 x 236.5 x 74.1 mm

Weight
1 Kg

Innovations
SlimLine™ grill, GoldCon™ &
QuickFix™



MERO6

Woofer/Tweeter
6" / 1"

Impedance
8 Ohm

100V tapplings

-

70V tapplings

-

Program power handling
120 W

Frequency range
44 Hz - 20 KHz

Dispersion
160° x 140° (H/V)

Cutout hole size
254 x 174 mm

Built-in depth
78.5 mm

Mounting
QuickFix™ screws

Connector
Springclamps

Dimensions (W x H x D)
196.5 x 276.5 x 82 mm

Weight
1.66 Kg

Innovations
SlimLine™ grill, GoldCon™ &
QuickFix™



WeatherTreated

AWP06I

Woofer/Tweeter
4"

Impedance
8 Ω / 100V

100V tapplings
1.5W / 3W / 6W

70V tapplings
0.75W / 1.5W / 3W

Program power handling
10 W

Frequency range
100 Hz - 15 KHz

Dispersion
150°

Cutout hole size
125 mm (\emptyset)

Built-in depth
148.5 mm

Mounting
Spring-clamp

Connector
Cable ends

Dimensions (\emptyset x H)
140 x 148.5 mm

Weight
0.79 Kg

IP-rating
IP65

Grill colour
White (RAL9016)



Weatherproof

SSP500

Woofer/Tweeter
5" / 1"

Impedance
8 Ohm

100V tapplings

-

70V tapplings

-

Program power handling
40 W

Frequency range
75 Hz - 20 KHz

Dispersion
100°

Cutout hole size
120 mm (Ø)

Built-in depth
60 mm

Mounting
Screw holes

Connector
Faston Connectors

Dimensions (Ø x H)
175 x 74 mm

Weight
0.62 Kg

IP-rating
IP44



CSF506

Woofers/Tweeters
5"

Impedance
8 Ohm

100V tapings
3W / 6W

70V tapings
-

Program power handling
10 W

Frequency range
90 Hz - 18 KHz

Front finish
Steel with flame retardant materials

Cutout hole size
160 mm (Ø)

Built-in depth
130 mm

Mounting
Wing bolts and firedome

Construction
Steel fire protection dome

Dimensions (Ø x H)
180 x 127 mm

Weight
1.30 Kg

IP-rating
-



IMEO2

Woofers/Midspeakers/Tweeters
2 x 2.5" / 2 x 2" / 2 x 1.5"

Volume control
Local, IR remote

Energy-saving
Auto-standby

DSP/Tone control
WaveSelect™ presets

Program power handling
2 x 15W / 1 x 30W

Max SPL
90dB

Frequency range
40Hz - 20kHz

Bluetooth
V4.2

Mounting
Wall mounting bracket

Connector
Coax + Optical SP/DIF, Jack, HDMI ARC, USB

Dimensions
1000 x 60.8 x 111.3mm (excl. bracket)

Weight
3.60 Kg

Innovations
WaveSelect™



ATEO2

Woofer/Tweeter

2" (Fullrange)

Impedance

8 / 16 Ohm (D)

100V tapplings

-

70V tapplings

-

Program power handling

20 W

Max SPL

93 dB

Frequency range

100 Hz - 20 kHz

Dispersion

145° H / 170° V

IP Rating

-

Mounting

CleverMount™

Connector

2-pin Euro Terminal Block

Dimensions (W x H x D)

80 x 136 x 115 mm

Weight

0.39 Kg

Innovations

CleverMount™



ATEO2S

Woofer/Tweeter
2" (Fullrange)

Impedance
8 / 16 Ohm (D)

100V tapplings

-

70V tapplings

-

Program power handling
20 W

Max SPL
93 dB

Frequency range
100 Hz - 20 kHz

Dispersion
145° H / 170° V

IP Rating

-

Mounting
Bracket with ClickMount™

Connector
2-pin Euro Terminal Block

Dimensions (W x H x D)
80 x 136 x 115 mm

Weight
0.39 Kg

Innovations
ClickMount™



Weatherproof

ATEO4M

Woofers/Tweeters
4" / 1"

Impedance
8 / 16 Ohm (D) / 100V / 70V

100V tapings
6W / 12W / 24W

70V tapings
3W / 6W / 12W / 24W

Program power handling
70 W

Max SPL
101 dB

Frequency range
65 Hz - 20 kHz

Dispersion
130° H / 130° V

IP Rating
IP66

Mounting
CleverMount+™

Connector
WAGO SnapConnect™

Dimensions (W x H x D)
136 x 244 x 173 mm

Weight
2.05 Kg

Innovations
CleverMount+™



Weatherproof

ATEO6M

Woofers/Tweeters
6" / 1"

Impedance
8 / 16 Ohm (D) / 100V / 70V

100V tapings
12.5W / 25W / 50W

70V tapings
6.25W / 12.5W / 25W / 50W

Program power handling
120 W

Max SPL
106 dB

Frequency range
55 Hz - 20 kHz

Dispersion
120° H / 120° V

IP Rating
IP66

Mounting
CleverMount+™

Connector
WAGO SnapConnect™

Dimensions (W x H x D)
193.1 x 347.5 x 235 mm

Weight
3.82 Kg

Innovations
CleverMount+™



WX302

Woofer/Tweeter
3" / 1"

Impedance
8 Ohm / 100V / 70V

100V tapplings
10W / 20W

70V tapplings
5W / 10W / 20W

Program power handling
60 W

Max SPL
85 dB

Frequency range
60 Hz - 20 kHz

Dispersion
100° H / 100° V

IP Rating
IP40

Mounting
Mounting bracket

Connector
4-pin Euro Terminal Block

Dimensions (W x H x D)
188.4 x 129 x 164.8 mm

Weight
1.66 Kg

Innovations
-



Weatherproof

WX302_O

Frequency Range

60Hz - 20kHz

Max SPL

100dB

Program power handling

60W

Impedance

8 Ω / 100V

Dispersion

100° H / 100° V

Woofer / Tweeter

3" / 1"

100V tapplings

10W / 20W

70V tapplings

5W / 10W / 20W

IP rating

IP55

Mounting

Mounting Bracket

Connector

AWX5™ connector

Dimensions (W x H x D)

199 x 129 x 120 mm

Weight

1.66 Kg

Innovations

AWX5™ connector



WX502

Woofer/Tweeter
5¼" / 1"

Impedance
8 Ohm / 100V / 70V

100V tapplings
20W / 40W

70V tapplings
10W / 20W / 40W

Program power handling
100 W

Max SPL
87 dB

Frequency range
55 Hz - 20 kHz

Dispersion
110° H / 110° V

IP Rating
IP40

Mounting
Mounting bracket

Connector
4-pin Euro Terminal Block

Dimensions (W x H x D)
219 x 146 x 184.4 mm

Weight
2.75 Kg

Innovations
-



Weatherproof

WX502_O

Frequency Range

55Hz - 20kHz

Max SPL

104dB

Program power handling

100W

Impedance

8 Ω / 100V

Dispersion

110° H / 110° V

Woofer / Tweeter

5¼" / 1"

100V tapplings

20W / 40W

70V tapplings

10W / 20W / 40W

IP rating

IP55

Mounting

Mounting Bracket

Connector

AWX5™ connector

Dimensions (W x H x D)

212 x 147 x 136 mm

Weight

2.54 Kg

Innovations

AWX5™ connector



WX802

Woofer/Tweeter
8" / 1"

Impedance
8 Ohm / 100V / 70V

100V tapplings
30W / 60W

70V tapplings
15W / 30W / 60W

Program power handling
140 W

Max SPL
89 dB

Frequency range
50 Hz - 20 kHz

Dispersion
110° H / 110° V

IP Rating
IP40

Mounting
Mounting bracket

Connector
4-pin Euro Terminal Block

Dimensions (W x H x D)
358 x 276.1 x 285.6 mm

Weight
7.50 Kg

Innovations
-



Weatherproof

WX802_O

Frequency Range

50Hz - 20kHz

Max SPL

108dB

Program power handling

140W

Impedance

16 Ω / 100V

Dispersion

110° H / 110° V

Woofer / Tweeter

8" / 1"

100V tapplings

30W / 60W

70V tapplings

15W / 30W / 60W

IP rating

IP55

Mounting

Mounting Bracket

Connector

AWX5™ connector

Dimensions (W x H x D)

270 x 360 x 215 mm

Weight

7.50 Kg

Innovations

AWX5™ connector



NELO706(I)

Woofers/Tweeters

6.5" (Fullrange)

Impedance

100V / 70V

100V tapings

3W / 6W

70V tapings

1.5W / 3W / 6W

Program power handling

20 W

Max SPL

106 dB

Frequency range

70 Hz - 18 kHz

Dispersion

140° Conical

IP Rating

-

Mounting

Wall/Ceiling mounting

Connector

SnapConnect™

Dimensions (Ø x H)

206.5 x 95 mm

Weight

1.08 Kg

Innovations

SnapConnect™

Grill colour

I/W - White (RAL9016)

& /B - Black (RAL9005)



NELO706V(I)

Woofer/Tweeter

6,5" (Fullrange)

Impedance

100V / 70V

100V tapplings

3W / 6W

70V tapplings

1.5W / 3W / 6W

Program power handling

20 W

Max SPL

106 dB

Frequency range

70 Hz - 18 kHz

Dispersion

140° Conical

IP Rating

-

Mounting

Wall/Ceiling mounting

Connector

SnapConnect™

Dimensions (Ø x H)

206.5 x 95 mm

Weight

1.11 Kg

Innovations

SnapConnect™

Grill colour

I/W - White (RAL9016)

& /B - Black (RAL9005)



Active speaker

ARES5A

Woofers/Tweeters
5 1/4" / 13mm PEI

Volume control
Local, remote panel

Energy saving
Energy-Star Certified

DSP/Tone control
2-band tone control

Program power handling
2 x 40 W

Max SPL
88dB

Frequency range
80Hz - 20 kHz

Dispersion
210° (H) x 205° (V)

IP Rating
-

Mounting
Wall mounting bracket

Connector
Euro terminal block / RJ45 / Jack (2x)

Dimensions
150 x 240 x 146 mm

Weight
3.50 Kg (pair)

Innovations
-



Weatherproof

VIRO5

Woofer/Tweeter

5 1/4" / 1"

Impedance

8 / 16 Ohm (D)

100V tapplings

Optional (TRV106)

70V tapplings

Optional (TRV106)

Program power handling

120 Watt

Max SPL

110 dB

Frequency range

50 Hz - 20 kHz

Dispersion

160°

IP Rating

IP55

Mounting

Bracket + 3/8" stand fitting

Connector

4-pin Terminal Block (CVS102 speaKON optional)

Dimensions (W x H x D)

180 x 180 x 191 mm

Weight

4.2 Kg

Innovations

-



Weatherproof

ALTI4M

Woofers/Tweeters
4" / 1"

Impedance
16 Ohm / 100V / 70V

100V tapings
12W / 24W

70V tapings
6W / 12W / 24W

Program power handling
60 W

Max SPL
95.1 dB

Frequency range
65 Hz - 20 kHz

Dispersion
165° Conical

IP Rating
IP65

Mounting
2-way Revolving mounting bracket

Connector
AWX5™ Connector

Dimensions (Ø x H)
170 x 223 mm

Weight
2.31 Kg

Innovations
SlideCap™, AWX5™ connector



Weatherproof

ALT16M

Woofer/Tweeter
6" / 1"

Impedance
16 Ohm / 100V / 70V

100V tapplings
15W / 30W / 60W

70V tapplings
7.5W / 15W / 30W / 60W

Program power handling
120 W

Max SPL
101 dB

Frequency range
61,5 Hz - 20 kHz

Dispersion
115° Conical

IP Rating
IP65

Mounting
2-way Revolving mounting bracket

Connector
AWX5™ Connector

Dimensions (Ø x H)
230 x 302 mm

Weight
3.48 Kg

Innovations
SlideCap™, AWX5™ connector



XENO6

Woofer/Tweeter
6" / 1"

Impedance
8 Ohm

100V tapplings
-

70V tapplings
-

Program power handling
160 W

Max SPL
110 dB

Frequency range
55 Hz - 20 kHz

Dispersion
120° H / 120° V

IP Rating
-

Mounting
2-way Revolving mounting bracket

Connector
4-pin Euro Terminal Block

Dimensions (W x H x D)
210 x 345 x 220 mm

Weight
5.60 Kg

Innovations
-



XENO8

Woofer/Tweeter
8" / 1"

Impedance
8 Ohm

100V tapplings
-

70V tapplings
-

Program power handling
240 W

Max SPL
110 dB

Frequency range
50 Hz - 20 kHz

Dispersion
120° H / 120° V

IP Rating
-

Mounting
2-way Revolving mounting bracket

Connector
4-pin Euro Terminal Block

Dimensions (W x H x D)
250 x 380 x 262 mm

Weight
7.80 Kg

Innovations
-



VEXO8

Woofer/Tweeter
8" / 1"

Impedance
8 Ohm

100V tapings

-

70V tapings

-

Program power handling
350 W

Max SPL
115 dB

Frequency range
55 Hz - 20 kHz

Dispersion
100° H / 80° V

IP Rating

-

Mounting

2-way Revolving mounting bracket

Connector

2x speakON compatible

Dimensions (W x H x D)

250 x 380 x 262 mm

Weight

9.70 Kg

Innovations

-



VEXO106

Woofers/Tweeters
6,5" & 1" comp. driver

Impedance
8 Ω

100V tapings
Optional (TRM012)

70V tapings
Optional (TRM012)

Program power
250 W

Max SPL
113 dB

Frequency range (-10 dB)
63 Hz - 20 kHz

Dispersion
116°H / 128°V (1 - 4 KHz - Avg 1/3 oct)

Mounting
1 x M8 (Top) & 1 x M8 (Bottom)
4 x M8, 4 x M6 (Rear)
Optional Swivel- or U-bracket

Connector
2 x speakON compatible

Dimensions (W x H x D)
196 x 355 x 205 mm

Weight
6.33 Kg

Innovations
DuraCoat™



VEXO108

Woofers/Tweeters
8" / 1.4" comp. driver

Impedance
8 Ohm

100V tapings
Optional (TRM012)

70V tapings
Optional (TRM012)

Program power handling
400 W

Max SPL
118 dB

Frequency range
70 Hz - 20 kHz

Dispersion
90°H / 70°V

Mounting
35 mm pole adapter
4 x M8 & 4 x M6 (rear) & 1 x M6
(top) & 1 x M10

Connector
2x speakON compatible

Dimensions (W x H x D)
244 x 425 x 256 mm

Weight
9.4 Kg

Innovations
DuraCoat™



 Active speaker
(Version available)

VEXO110(A)

Woofers/Tweeters
10" / 1"

Impedance
8 Ohm

100V tapings
Optional (TRM124)

70V tapings
Optional (TRM124)

Program power handling
600 W

Max SPL
121 dB

Frequency range
65Hz - 20 kHz

Dispersion
90°H / 70°V

Active/Passive
Also active version available

Mounting
35 mm pole adapter / 10 x M10

Connector
2x speakON compatible

Dimensions (W x H x D)
329 x 540 x 345 mm

Weight
17.3 Kg

Innovations
DuraCoat™ & TouchLink™
(Active)



 Active speaker
(Version available)

VEXO112(A)

Woofers/Tweeters
12" / 1"

Impedance
8 Ohm

100V tapings
Optional (TRM224/TRM248)

70V tapings
Optional (TRM224/TRM248)

Program power handling
800 W

Max SPL
125 dB

Frequency range
58Hz - 20 kHz

Dispersion
90°H / 70°V

Active/Passive
Also active version available

Mounting
35 mm pole adapter / 10 x M10

Connector
2x speakON compatible

Dimensions (W x H x D)
369 x 610 x 390 mm

Weight
23.4 Kg

Innovations
DuraCoat™ & TouchLink™
(Active)



 Active speaker
(Version available)

VEX0115(A)

Woofers/Tweeters
15" / 1"

Impedance
8 Ohm

100V tapings
Optional (TRM224/TRM248)

70V tapings
Optional (TRM224/TRM248)

Program power handling
1000 W

Max SPL
127 dB

Frequency range
50Hz - 20 kHz

Dispersion
90°H / 70°V

Active/Passive
Also active version available

Mounting
35 mm pole adapter / 10 x M10

Connector
2x speakON compatible

Dimensions (W x H x D)
429 x 690 x 450 mm

Weight
28.7 Kg

Innovations
DuraCoat™ & TouchLink™
(Active)



VEXO206(_O)

Woofer/Tweeter

2.5-way dual 6.5" Coax. LF with 1.5" VC

Impedance

8 Ω

100V tapplings

Optional (TRM012/TRM024)

70V tapplings

Optional (TRM012/TRM024)

Program power handling

500 W

Max SPL

119 dB

Frequency range (-10 dB)

60 Hz - 20 kHz

Dispersion

117°H / 114°V (1-4 KHz - Avg 1/3 oct)

IP Rating (Outdoor model only)

TBA

Mounting

2 x M6 & 2 x M10 + Incl. U-bracket

Optional 35 mm pole adapter

Connector

2 x speakON compatible

Dimensions (W x H x D)

560 x 211 x 220 mm

Weight

14 kg

Innovations

DuraCoat™



VEXO2081(_O)

Woofers/Tweeters
3-way dual 8" drivers

Impedance
8 Ω

100V tapings
Optional (TRM012/TRM024)

70V tapings
Optional (TRM012/TRM024)

Program power handling
800 W

Max SPL
121 dB

Frequency range (-10 dB)
46 Hz - 20 kHz

Dispersion
96°H / 100°V (1 - 4 KHz - Avg 1/3 oct)

IP Rating (Outdoor model only)
TBA

Mounting
2 x M6 & 2 x M10 + Incl. U-bracket
Optional 35 mm pole adapter

Connector
2 x speakON compatible

Dimensions (W x H x D)
710 x 260 x 290 mm

Weight
17 kg

Innovations
DuraCoat™





Weatherproof

FX1.18

Frequency Range

33 Hz - 130 Hz

Max SPL

131 dB

Program power handling

1600W

Impedance

8 Ω

Dispersion

X

Woofer / Tweeter

18"

100V tapplings

-

70V tapplings

-

IP rating

IP55

Mounting

Mounting bracket available

Connector

2x 4-pin speakON

Dimensions (W x H x D)

714 x 600 x 800 mm

Weight

63.3 Kg

Innovations

DuraCoat™



Weatherproof

FX3.15

Frequency Range

85 Hz - 20 kHz

Max SPL

134 dB

Program power handling

1500W

Impedance

8 Ω

Dispersion

90° H / 40° V

Woofer / Tweeter

15" / 6" / 1.75"

100V tapplings

-

70V tapplings

-

IP rating

IP55

Mounting

Mounting bracket available

Connector

2x 8-pin speakON

Dimensions (W x H x D)

714 x 456 x 580 mm

Weight

47.5 Kg

Innovations

DuraCoat™



KYRA6

Woofers/Tweeters
6 x 2"

Impedance
12 Ohm / 100V / 70V

100V tapings
5W / 10W / 20W

70V tapings
2,5W / 5W / 10W / 20W

Program power handling
120 W

Max SPL
106 dB

Frequency range
120 Hz - 20 kHz

Dispersion
174° H / 28° V

IP Rating
IP3x

Mounting
2-way Revolving mounting bracket

Connector
3-pin Euro Terminal Block

Dimensions (W x H x D)
70 x 546 x 101 mm

Weight
2.26 Kg

Innovations
-



KYRA12

Woofers/Tweeters

12 x 2"

Impedance

12 Ohm / 100V / 70V

100V tapings

10W / 20W / 40W

70V tapings

5W / 10W / 20W / 40W

Program power handling

240 W

Max SPL

113 dB

Frequency range

120 Hz - 20 kHz

Dispersion

174° H / 9° V

IP Rating

IP3x

Mounting

2-way Revolving mounting bracket

Connector

3-pin Euro Terminal Block

Dimensions (W x H x D)

70 x 1006 x 101 mm

Weight

4.30 Kg

Innovations

-



Weatherproof

KYRA12_O

Frequency Range

120Hz - 20kHz

Max SPL

113 dB

Program power handling

240W

Impedance

12 Ω / 100V / 70V

Dispersion

110° H / 110° V

Woofers / Tweeters

12 x 2"

100V tapings

20W / 40W

70V tapings

10W / 20W / 40W

IP rating

IP55

Mounting

2-Way revolving bracket

Connector

AWX5™ connector

Dimensions (W x H x D)

70 x 1006 x 101 mm

Weight

4.30 Kg

Innovations

AWX5™ connector



KYRA24

Woofer/Tweeter
24 x 2"

Impedance
4 Ohm

100V tapings
-

70V tapings
-

Program power handling
480 W

Max SPL
113 dB

Frequency range
120 Hz - 20 kHz

Dispersion
174° H / 7° V

IP Rating
IP3x

Mounting
2-way Revolving mounting bracket

Connector
3-pin Euro Terminal Block

Dimensions (W x H x D)
70 x 2006 x 101 mm

Weight
6.50 Kg

Innovations
-



LINO4

Woofer/Tweeter

4 x 2" / 1"

Impedance

8 Ohm / 100V / 70V

100V tapplings

5W / 10W / 20W

70V tapplings

2,5W / 5W / 10W / 20W

Program power handling

40 W

Max SPL

101 dB

Frequency range

120 Hz - 20 kHz

Dispersion

160° H / 33° V

IP Rating

-

Mounting

L-shaped brackets

Connector

6-pin Euro Terminal Block

Dimensions (W x H x D)

72 x 414 x 68.3 mm

Weight

1.76 Kg

Innovations

-



LINO10

Woofer/Tweeter

10 x 2" / 1"

Impedance

20 Ohm / 100V / 70V

100V tapplings

10W / 20W / 40W

70V tapplings

5W / 10W / 20W / 40W

Program power handling

80 W

Max SPL

107 dB

Frequency range

120 Hz - 20 kHz

Dispersion

160° H / 15° V

IP Rating

-

Mounting

L-shaped brackets

Connector

6-pin Euro Terminal Block

Dimensions (W x H x D)

72 x 796 x 68.3 mm

Weight

3.70 Kg

Innovations

-



VIRO_C201

Woofers/Tweeters

2 x 1.3"

Impedance

8 Ω

100V tapings

-

70V tapings

-

Program power

40 W

Max SPL (Peak dBZ)

117 dBZ

Max SPL

96 dB

Frequency range (-10 dB)

235 Hz - 20 kHz

Dispersion

160°H / 120°V (1 - 4 KHz - Avg 1/3 oct)

IP Rating

-

Mounting

Wall & flush mount w/ invisible hardware

Connector

SnapConnect™

Dimensions (W x H x D)

42 x 150 x 34,5 mm

Weight

0.29 kg

Innovations

SnapConnect™ & ThermalDrive





VIRO_C801

Woofer/Tweeter

8 x 1.3"

Impedance

8 / 32 Ω

100V tapplings

-

70V tapplings

-

Program power

160 W

Max SPL (Peak dbZ)

126 dBZ

Max SPL

108 dB

Frequency range (-10 dB)

235 Hz - 20 kHz

Dispersion

160°H / 30°V (1 - 4 KHz - Avg 1/3 oct)

IP Rating

-

Mounting

Flush mount with invisible hardware

Connector

SnapConnect™

Dimensions (W x H x D)

42 x 360 x 34,5 mm

Weight

0.80 kg

Innovations

SnapConnect™ & ThermalDrive



VIRO_C1601

Woofers/Tweeters

16 x 1.3"

Impedance

4/16 Ω

100V Tappings

-

70V Tappings

-

Program Power

320 W

Max SPL (Peak dBZ)

132 dBZ

Max SPL

114 dB

Frequency Range (-10 dB)

235 Hz - 20 kHz

Dispersion

160°H / 15°V (1 - 4 kHz - Avg 1/3 Oct)

IP Rating

-

Mounting

Flush mount with invisible hardware

Connector

SnapConnect™

Dimensions (W x H x D)

42 x 680 x 34.5 mm

Weight

1.5 kg

Innovations

SnapConnect™ & ThermalDrive



NELO706 (w/ CSK100)

Woofers/Tweeters

6,5" (Fullrange)

Impedance

100V / 70V

100V tapings

3W / 6W

70V tapings

1.5W / 3W / 6W

Program power handling

20 W

Max SPL

106 dB

Frequency range

70 Hz - 18 kHz

Dispersion

140° Conical

IP Rating

-

Mounting

3.5 meters long steel wire

Connector

SnapConnect™

Dimensions (Ø x H)


206.5 x 95 mm

Weight

1.08 Kg

Innovations

SnapConnect™

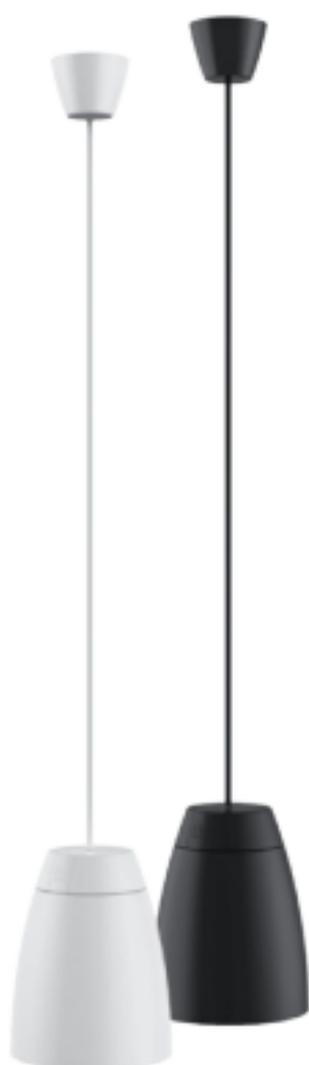

|
ALTI4

Woofers/Tweeters
4" / 1"

Impedance
16 Ohm / 100V / 70V

100V tapings
6W / 12W / 24W

70V tapings
3W / 6W / 12W / 24W

Program power handling
60 W

Max SPL
95.1 dB

Frequency range
65 Hz - 20 kHz

Dispersion
165° Conical

IP Rating
-


Mounting
Gripple™ hanger

Connector
4-pin Euro Terminal Block

Dimensions (Ø x H)
170 x 223 mm

Weight
2.23 Kg

Innovations
SlideCap™

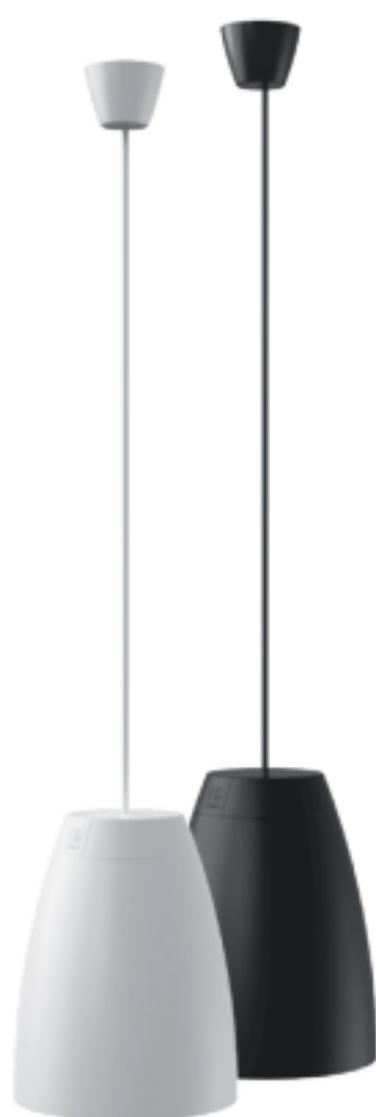

|
ALTI6

Woofer/Tweeter
6" / 1"

Impedance
16 Ohm / 100V / 70V

100V tapplings
15W / 30W / 60W

70V tapplings
7,5W / 15W / 30W / 60W

Program power handling
120 W

Max SPL
101 dB

Frequency range
61.5 Hz - 20 kHz

Dispersion
115° Conical

IP Rating
-

Mounting
Gripple™ hanger

Connector
4-pin Euro Terminal Block

Dimensions (Ø x H)
230 x 302 mm

Weight
3.39 Kg

Innovations
SlideCap™



ASP20

Woofer/Tweeter
8"

Impedance
100V / 70V

100V tapplings
5W / 10W / 20W

70V tapplings
2.5W / 5W / 10W / 20W

Program power handling
40 W

Max SPL
103 dB

Frequency range
80 Hz - 18 kHz

Dispersion
360° H

IP Rating
IP56

Mounting
1.5 m connection cable

Connector
Multi-core connection

Dimensions (Ø)
254 mm

Weight
2.95 Kg

Innovations
-



Weatherproof

SP20

Frequency Range

130 Hz - 15 kHz

Max SPL

104 dB

Program power handling

40 W

Impedance

8 Ω

Dispersion

180°

Woofer / Tweeter

5"

100V tapplings

20W / 10W / 5W / 2.5W

70V tapplings

-

IP rating

IP56

Mounting

Stainless steel U-bracket

Connector

75 cm connection cable

Dimensions (Ø x D)

138 x 204 mm

Weight

1.90 Kg

Innovations

-



Weatherproof

SP22

Frequency Range

110 Hz - 15 kHz

Max SPL

93 dB

Program power handling

20 W

Impedance

100V

Dispersion

126°

Woofer / Tweeter

5"

100V tapplings

20W / 10W / 5W

70V tapplings

-

IP rating

IP56

Mounting

Stainless steel U-bracket

Connector

3 m connection cable

Dimensions (Ø x D)

138 x 205 mm

Weight

2.20 Kg

Innovations

-



Weatherproof

SP202

Frequency Range

150 Hz - 14 kHz

Max SPL

91 dB

Program power handling

2 x 10 Watt

Impedance

100V

Dispersion

360°

Woofer / Tweeter

2 x 5 1/4"

100V tapplings

2 x 10W / 2 x 5W / 2 x 2.5W

70V tapplings

-

IP rating

IP56

Mounting

Stainless steel U-bracket

Connector

Multi-core fixed connection cable

Dimensions (Ø x D)

138 x 190 mm

Weight

2.4 Kg

Innovations

-



Weatherproof

CHA530

Frequency Range

110 Hz - 16 kHz

Max SPL

98 dB

Program power handling

60 W

Impedance

100V

Dispersion

110° H / 60° V

Woofers / Tweeters

5" / 1"

100V tapings

3.75W / 7.5W / 15W / 30W

70V tapings

-

IP rating

IP66

Mounting

Steel Brackets

Connector

AWX5™ Connector

Dimensions (W x H x D)

310 x 215 x 330 mm

Weight

4.70 Kg

Innovations

AWX5™ connector



Weatherproof

CHA660

Frequency Range

100 Hz - 16 kHz

Max SPL

116 dB

Program power handling

120 W

Impedance

100V / 70V

Dispersion

100° H / 60° V

Woofer / Tweeter

6.5" / 1"

100V tapplings

15W / 30W / 60W

70V tapplings

7.5W / 15W / 30W / 60W

IP rating

IP66

Mounting

Steel Brackets

Connector

AWX5™ Connector

Dimensions (W x H x D)

420 x 335 x 400 mm

Weight

6.70 Kg

Innovations

AWX5™ connector



Weatherproof

HS121

Frequency Range

150 Hz - 15 kHz

Max SPL

109 dB

Program power handling

40 W

Impedance

8 Ω / 100V

Dispersion

60° H / 80° V

Woofer / Tweeter

4" (Fullrange)

100V tapplings

5W / 10W / 20W

70V tapplings

-

IP rating

IP65

Mounting

Aluminium U bracket

Connector

AWX5™ Connector

Dimensions (W x H x D)

220 x 160 x 250 mm

Weight

2.00 Kg

Innovations

AWX5™ connector



Weatherproof

HS208

Frequency Range

70 Hz - 20 kHz

Max SPL

123 dB

Program power handling

300W

Impedance

8 Ω

Dispersion

40° H / 40° V

Woofer / Tweeter

8" / 1.3"

100V tapplings

-

70V tapplings

-

IP rating

IP54

Mounting

Various accessories available

Connector

2 x heavy-duty speakON

Dimensions (W x H x D)

360 x 360 x 482 mm

Weight

11.60 Kg

Innovations

-



Weatherproof

HS208T

Frequency Range

70 Hz - 20 kHz

Max SPL

123 dB

Program power handling

300W

Impedance

8 Ω / 100V

Dispersion

40° H / 40° V

Woofer / Tweeter

8" / 1.3"

100V tapplings

30W / 60W / 120W

70V tapplings

-

IP rating

IP65

Mounting

Various mounting options

Connector

Terminal connector in waterproof box

Dimensions (W x H x D)

360 x 360 x 482 mm

Weight

15.6 Kg

Innovations

-



Weatherproof

HS212

Frequency Range

65 Hz - 20 kHz

Max SPL

125 dB

Program power handling

700 W

Impedance

8 Ω

Dispersion

40° H / 40° V

Woofer / Tweeter

12" / 1.8"

100V tapplings

-

70V tapplings

-

IP rating

IP54

Mounting

Various accessories available

Connector

2 x heavy-duty speakON

Dimensions (W x H x D)

508 x 508 x 732 mm

Weight

30.80 Kg

Innovations

-



Weatherproof

HS212T

Frequency Range

65 Hz - 20 kHz

Max SPL

125 dB

Program power handling

700W

Impedance

8 Ω / 100V

Dispersion

40° H / 40° V

Woofer / Tweeter

12" / 1.8"

100V tapplings

60W / 120W / 240W

70V tapplings

-

IP rating

IP65

Mounting

Various mounting options

Connector

Terminal connector in waterproof box

Dimensions (W x H x D)

508 x 508 x 732 mm

Weight

34.5 Kg

Innovations

-



NOBA8

Frequency range (-10dB)
45 Hz - 350 Hz

Max. SPL
108 dB

Program power handling
200 Watt

Impedance
8 Ω

Woofer
8"

Active/Passive
Passive

Cabinet type
Bass reflex cabinet

Mounting
Wall or ceiling (MBK410C) mount

Connector
2-pin Euro Terminal Block

Dimensions (W x H x D)
558 x 383 x 149 mm

Weight
8.75 Kg

Innovations
-



MarineGrade

ARCH18X

Frequency range (-10dB)

36 Hz - 250 Hz

Max. SPL

118 dB

Program power

500 Watt

Impedance

8 Ω

Woofers

8" woofer & 10" passive radiator

Cabinet type

Compact architectural subwoofer

Mounting

Wall or Ceiling

Connector

Terminal block connector

Dimensions (W x H x D)

655 x 383 x 170.5 mm

Weight

TBA

IP-rating

IP65 (Preliminary)

Innovations

-



ARCH110

Frequency range (-10dB)
54 Hz – 200 Hz

Max. SPL
124 dB

Program power
450 Watt

Impedance
8 Ω

Woofers
10" Ferrite low-loss & 1.5" VC

Cabinet type
Compact architectural subwoofer

Mounting
Standing | Optional: Wall or Ceiling

Connector
Terminal block connector

Dimensions (W x H x D)
405 x 312 x 334 mm

Weight
11.2 kg

Innovations
AeroVent



ARCH110X(_O)

Frequency range (-10dB)
26 Hz - 120 Hz

Max. SPL
117 dB

Program power
700 Watt

Impedance
8 Ω

Woofers
10" Anodized Alu & 2" VC

Cabinet type
Ultra-compact architectural infra-sub

Mounting
Standing | Optional: Wall or Ceiling

Connector
Terminal block connector

Dimensions (W x H x D)
540 x 246 x 558 mm

Weight
25.5 kg

IP-rating (Outdoor model only)
IP55

Innovations
AeroVent



ARCHI210

Frequency range (-10dB)
47 Hz – 200 Hz

Max. SPL
128 dB

Program power
900 Watt

Impedance
4 Ω / 16 Ω

Woofers
2 x 10" Ferrite low-loss & 1.5" VC

Cabinet type
Compact architectural subwoofer

Mounting
Standing | Optional: Wall or Ceiling

Connector
Terminal block connector

Dimensions (W x H x D)
868 x 302 x 318 mm

Weight
23.1 kg

Innovations
AeroVent



BASS0112(_O)

Frequency range (-10dB)
26 Hz - 200 Hz

Max. SPL
124 dB

Program power
2000 Watt

Impedance
8 Ω

Woofers
12" Carbon cone & 3.5" VC

Cabinet type
Ultra-high power infra-sub

Mounting
Standing | Optional: Wall or Ceiling

Connector
Terminal block connector

Dimensions (W x H x D)
608 x 371 x 595 mm

Weight
26 kg

IP-rating (Outdoor model only)
IP55

Innovations
AeroVent



WeatherTreated

BASS0115(_0)

Frequency range (-10dB)

31 Hz – 200 Hz

Max. SPL

130 dB

Program power

3000 Watt

Impedance

8 Ω

Woofers

15" Carbon cone & 4" VC

Cabinet type

Ultra-high power infra-sub

Mounting

Standing | Optional: Wall or Ceiling

Connector

Terminal block connector

Dimensions (W x H x D)

688 x 451 x 703 mm

Weight

35 kg

IP-rating (Outdoor model only)

IP55

Innovations

AeroVent



BASS0118(_0)

Frequency range (-10dB)
23 Hz - 200 Hz

Max. SPL
131 dB

Program power
3000 Watt

Impedance
8 Ω

Woofers
18" Carbon cone & 4" VC

Cabinet type
Ultra-high power infra-sub

Mounting
Standing | Optional: Wall or Ceiling

Connector
Terminal block connector

Dimensions (W x H x D)
758 x 555 x 798 mm

Weight
45 kg

IP-rating (Outdoor model only)
IP55

Innovations
AeroVent



Can't find what you are looking for?

Our new website offers added value for users & installers with a brief and clear overview of our audio solutions. Don't hesitate to contact us with all your questions or remarks!

audac.eu



Audio configurator

The best audio solution for your next project or installation! Easily find the most inspiring combined acoustic solutions with our audio configurator.

audac.eu/audio-configurator



BIM files

Facilitate your planning process using BIM files (Building Information Modelling). AUDAC would like to support you with custom-made files available for most loudspeakers, creating accurate project data and visualisation.

audac.eu/consultancy



EASE Adress

A professional software tool that allows the modeling of acoustic sources, distributed loudspeaker systems in particular, in two dimensions. It only considers the direct field, created by the addition of the sound contributions of the individual loudspeakers. EASE Address can be used for 70V/100V systems and also for low impedance systems.

audac.eu/software

AWX5™ connector

The AWX5™ connector is a specially designed connector that prevents the use of extra equipment and adjusting to a speaker system for setting the desired power tapping and maintaining a IP55 waterproof connection. The power setting can be made by simply rotating the connector.

CleverMount(+)[™]

Loudspeakers that are equipped with the CleverMount™ technology have the advantage of making the speaker cabinet flow together with the mounting bracket providing a great ease for installing the loudspeaker in one good-looking entity. Mounting and connection of the loudspeaker happens in seconds after attaching the wall plate to the desired location.

The improved weatherproof (IP66 rated) CleverMount+™ innovation makes it perfect for in- & outdoor applications. During installation, the wires can easily be connected to the integrated WAGO connectors.

ClickMount™

The ClickMount™ technology ensures a true plug-and-play user-friendly installation. This professional system has the advantage of making the speaker cabinet click onto its mounting bracket either



horizontally or vertically via a 6.3 mm jack connector. After installation, the speaker angle can be adjusted by using the bracket arm.

DuraCoat™

This textured paintwork provides a weatherproof and scratch resistant coating. It is specially designed for outdoor applications. Thanks to its UV-resistance, the cabinets will not lose their color nor paint strength after years of outdoor use.

DuraWeather™

This special coating is developed for speaker cones and aluminum grills for an additional protection against moisture. The loudspeakers that are treated with a DuraWeather™ coating have the advantage to be placed in almost any humid or outdoor environments and maintain the same stunning sound quality.

SlideCap™

Mounting the speaker is done through a connection cable with two integrated steel cores for suspending with an additional drop safety. Fixation is made through two snap-hooks on one end and a dual Gripple™ fixation on the other end. A cable of 3.5 meters comes included with the ALTI series, other lengths and colors optionally available (DSC70 and DSC100).

SnapConnect™

A more user-friendly equivalent for screw terminal connectors to connect speaker cables together. SnapConnect™ is a faster, more reliable and safer choice for fixed installations, accepting solid and stranded wires with sections up to 4.0 mm².

SolidGrip™

The SolidGrip™ handle is fully integrated in the side of a speaker cabinet and provides a solid grip for moving and carrying the cabinets. These elegant but discrete carry handles give a benefit in transporting and contribute to the design of the cabinet.

WaveSelect™

Our active loudspeaker systems with WaveSelect™ technology are equipped with a powerful internal Digital Signal Processor which gives you the option to choose from a number of programmed presets. Like this, you can always find a preset that best suits your needs. Use WaveSelect™ to optimize your speaker for the task at hand.

ThermalDrive

ThermalDrive is an engineered heat management system that channels heat away from the speaker drivers and electronics directly into the aluminium rear chassis.

By spreading and dissipating heat across the full structure, ThermalDrive prevents hotspots, protects critical components, and ensures consistent performance.

AeroVent

Experience the revolution in low-frequency performance with AeroVent - an exponential low-noise vent design engineered for the ARCHI series.

AeroVent minimizes airflow noise while maximizing sound impact, delivering deep, precise bass even at the highest power levels.



Warranty

We design products that last! In the development process that takes place entirely in Belgium, we only choose high-quality components that guarantee a long product lifespan. The confidence we have in the quality of our solutions is reflected in our warranty policy.

AUDAC takes pride in offering a robust warranty policy for its entire AV range of products. With a commitment to quality and customer satisfaction, we provide a 5-year warranty, ensuring peace of mind for our valued customers across amplifiers, media players, and passive speakers.



5 YEARS WARRANTY
ON ALL PRODUCTS

Disclaimer

Please note that this document has been compiled with the greatest care. The information contained herein is believed to be correct but is not guaranteed. We are not responsible for any model and specification changes.



Kolmenstraat 149 - 3512 Hasselt - Belgium
audac.eu | info@audac.eu | Tel.: +32 11 27 55 66

V2.2