


The MBK62xA is a dedicated steel mounting bracket designed specifically for the AUDAC ARCHI series architectural subwoofers, enabling secure and discreet installation on walls or ceilings. With its durable black finish and all necessary mounting hardware included, the MBK62xA offers both reliability and ease of use. A smart sliding slot mechanism allows the subwoofer to glide smoothly into place for easy and secure installation, whether mounted horizontally or vertically. Rubber washers help minimize vibrations and protect mounting surfaces, while an integrated drop safety wire adds an extra layer of security against accidental falls.

Included hardware:

		MBK621A (ARCHI10)	MBK622A (ARCH10X)	MBK623A (ARCHI210)
	Mounting bracket* *The image is for illustrative purposes only, since it will differ from the various models.	1 piece	1 piece	1 piece
	Silentblock washer and rubber	4 pieces	4 pieces	4 pieces
	Metal washer	4 pieces	4 pieces	4 pieces
	M8x45 bolt	4 pieces	4 pieces	4 pieces
	Drop safety wire with buttonhead screw and spring washer	1 piece (M8 buttonhead screw)	1 piece (M10 buttonhead screw)	1 piece (M8 buttonhead screw)

Installation:

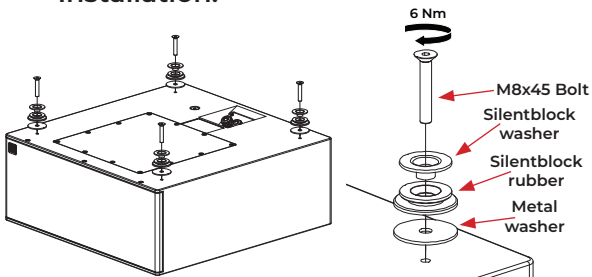


Step 1:

Remove the rubber feet from bottom of the cabinet or countersunk bolts from rear of the cabinet, depending on whether you plan to mount it from the bottom or the rear.

Insert the M8 bolts through Silentblock washer, then through the Silentblock rubber and the metal washer.

Screw them into the four threaded holes at the corners using 6 Nm tightening torque.


The silentblock rubber is used to reduce vibrations and protect the bracket's mounting surfaces.



Step 2:

Install the drop safety wire to the designated point using an M8 or M10 buttonhead screw and spring washer based on the model.




Secure the other end of the wire to a different mounting point on the wall or another structure that is separate from the main suspension surface.



Step 3:

Install the mounting bracket vertically or horizontally to the designated point on the wall.


Insert the Silentblock into the slots in the mounting bracket and slide to secure.



Step 4:

Secure the speaker to the bracket by tightening the 4 lock screws against the Silentblocks.

Dimensions:

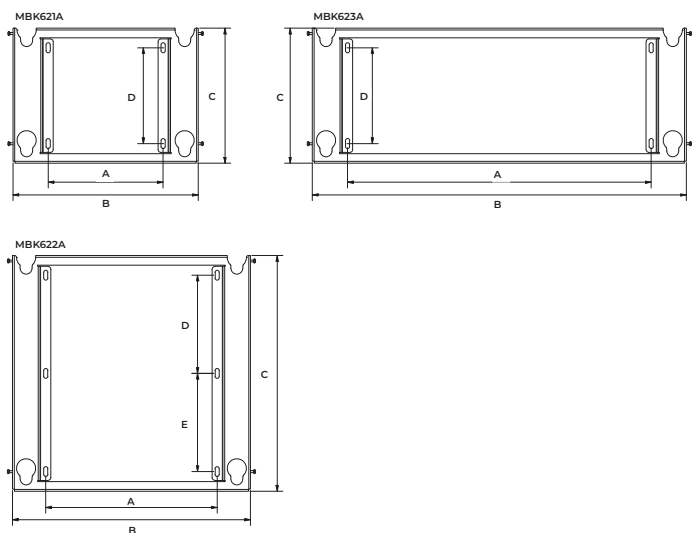

	MBK621A (ARCHI10)	MBK622A (ARCH10X)	MBK623A (ARCHI210)
A	240 mm	358 mm	634 mm
B	387 mm	497 mm	781 mm
C	282 mm	492 mm	282 mm
D	200 mm	205 mm	200 mm
E	-	205 mm	-

PRECAUTIONS

- KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE. NEVER THROW THEM AWAY
- ALWAYS HANDLE THIS UNIT WITH CARE
- CLEAN ONLY WITH DRY CLOTH
- HEED ALL WARNINGS AND FOLLOW ALL INSTRUCTIONS
- NEVER EXPOSE THIS EQUIPMENT TO RAIN, MOISTURE, ANY DRIPPING OR SPLASHING LIQUID.
- DO NOT PLACE THIS UNIT IN ENVIRONMENTS WITH A HIGH LEVEL OF DUST, HEAT, MOISTURE OR VIBRATION
- DO NOT USE HYDROCARBON BASED SOLVENTS, LUBRICANTS OR CLEANING AGENTS OF ANY TYPE ON OR AROUND THE DEVICE AND MOUNTING HARDWARE DURING THE INSTALLATION. THE USE OF THESE PRODUCTS ON OR AROUND THE MOUNTING ANCHORS AND SCREWS CAN LEAD TO DEGRADATION OF THE PLASTIC MATERIAL, POSSIBLY RESULTING IN CRACKING AND PREMATURE FAILURE OF THE PRODUCT.
- THIS UNIT IS DEVELOPED FOR INDOOR USE ONLY. DO NOT USE IT OUTDOORS
- ONLY INSTALL THE SPEAKER IN LOCATIONS THAT CAN STRUCTURALLY SUPPORT THE WEIGHT OF THE SPEAKER. IGNORING THIS CAN BRING THE SPEAKER DOWN.
- DO NOT USE ANY OTHER METHOD THAN SPECIFIED TO MOUNT THE SPEAKER. IF EXTREME FORCE IS APPLIED TO THE SPEAKER, IT COULD FALL DOWN
- ATTACH A SAFETY WIRE TO THE SPEAKER WHEN IT IS MOUNTED HIGH UP. ONLY USE INDUSTRY-ACCEPTED RIGGING TOOLS AND METHODS
- CAREFULLY CHECK THE UNIT'S CONDITION AFTER UNPACKING.
- IF THERE IS ANY DAMAGE TO THE CARTON BOX OR THE UNIT ITSELF, INFORM YOUR VENDOR IMMEDIATELY.

- ALWAYS FOLLOW THE LOCAL REGULATIONS AND REQUIREMENTS REGARDING INSTALLATION, SUSPENSION AND CONNECTION OF THIS LOUDSPEAKER. EVEN WHEN OTHERWISE SPECIFIED IN THIS DOCUMENT.
- IT'S THE INSTALLERS RESPONSIBILITY TO ENSURE INSTALLATION OF THE LOUDSPEAKERS AND MOUNTING SYSTEMS IS PERFORMED IN ACCORDANCE WITH ALL APPLICABLE CODES
- UNSAFE MOUNTING OR OVERHEAD SUSPENSION ON ANY HEAVY LOAD CAN RESULT IN SERIOUS INJURY OR DEATH, AND PROPERTY DAMAGE. IT'S THE INSTALLERS RESPONSIBILITY TO EVALUATE THE RELIABILITY OF ANY MOUNTING METHOD USED FOR THEIR APPLICATIONS
- THE INSTALLATION OF THIS LOUDSPEAKER SHALL BE DONE BY QUALIFIED PERSONNEL ONLY.
- DO NOT MAKE UNAUTHORIZED ALTERATIONS TO THE PRODUCT.
- The MBK621A mounting bracket is for the use with ARCHI10 only.
- The MBK622A mounting bracket is for the use with ARCHI10X only.
- The MBK623A mounting bracket is for the use with ARCHI210 only.

CAUTION - SERVICING

This product contains no user serviceable parts. Refer all servicing to qualified service personnel. Do not perform any servicing (unless you are qualified to do so).

EC DECLARATION OF CONFORMITY

This product conforms to all the essential requirements and further relevant specifications described in following directives: 2011/65/EU (RoHS2) and 1907/2006 (REACH)